




LUSA

ARCHITECTURAL LINEAR LUMINAIRES

VAR01 3318TA SS30

VAR01 3318TA SS40

VAR01 3318TA SS60

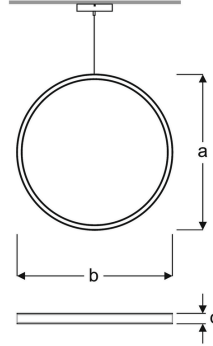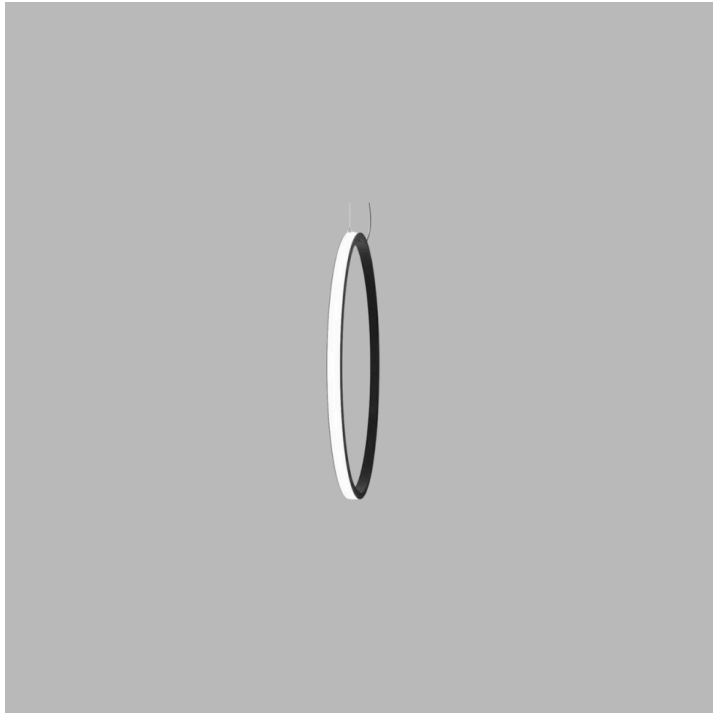

MECHANICAL SPECS / MEKANİK ÖZELLİKLER

Application Areas Uygulama Alanları	Sales room - Residential areas - Hospital - Commercial building
Luminaire Type Ürün Tipi	LED Architectural Pendant
Luminaire Body Ürün Gövdesi	Aluminum profile. Electrostatic powder coating
Luminaire Diffuser Ürün Difüzörü	Opal diffuser
Luminaire Colour Ürün Gövde Rengi	S : Ral 9005 Jet black / B : Ral 9016 Traffic White / G : Ral 9006 Grey
Ingress Protection (IP) Rating IP Sınıfı	IP40
Impact Resistance (IK) Rating IK Sınıfı	IK02

OPTICAL SPECS / OPTİK ÖZELLİKLER

Light Source Işık Kaynağı	Mid Power LED
CRI Value CRI Değeri	>80
UGR Value UGR Değeri	<21 (EN124664-1)
Photo Biological Class Fotobiyolojik Risk Grubu	Group-0 No Risk
Beam Angle Işık Açısı	120°
Driver (220-240V) Sürücü	Osram - Tridonic & ENEC Driver

ELECTRICAL SPECS / ELEKTRİKSEL ÖZELLİKLER

Mains Voltage Giriş Gerilimi	220-240 V
Mains Frequency Frekans	50/60 Hz
Protection Class Koruma Sınıfı	I
Led Service (25°C) Led Ömrü	L80=50.000h
Power Factor Güç Faktörü	>0,958
Operating Temperature Çalışma Sıcaklığı	-20°C & -45°C
Hot Wire Resistance Kablo Sıcaklık Direnci	650°C

OPTIONS / OPSİYONLAR

1 Hour Emergency Kit	3 Hour Emergency Kit	DALI	SENSOR
-	-	-	-

Product Code Ürün Kodu	Power (W) Watt	Lumen (lm) Işık Akısı	Efficacy (lm/W) Verimlilik	Col. Temp (K) Kelvin	Dimensions (mm) Boyutlar (a x b x c) Ø	Pack. Qty Koli Adedi	Pack. Weight (kg) Koli Ağırlığı
VAR01 3318TA SS30	18	1440	80	3000	300x300x22	1	2,00
VAR01 3318TA SS40	18	1440	80	4000	300x300x22	1	2,00
VAR01 3318TA SS60	18	1440	80	6000	300x300x22	1	2,00